





# Measure Sounds Reliably

Sound Level Meter class1 NL-52

Sound Level Meter class2 NL-42





## No paper manual is needed.


User instructions and a help function can be easily accessed on the device.



Measurement Display (Level-Time graph)



Measurement Display (Simultaneous display of Main and Sub channel)



Parameter Screen



Menu screen



Help screen

## Water-resistant (Except for the microphone)

Guaranteed water-resistant to at least level IP54 (resistant to spraying water). Helps reduce failures caused by sudden rain showers.



## Use of rechargeable batteries

In these new models it is possible to use rechargeable batteries which make these meters environmentally-friendly. 24 hour continuous measurement is possible (when using eneloop® or dry alkaline batteries).



- · Please use the dedicated charger to charged eneloop® batteries
- When using eneloop batteries, please read the eneloop® battery instruction manual
   eneloop® is a registered trademark of Panasonic group.

## Continuous detailed measurements for one month

This meter can be used to conduct long-term measurements, such as environmental measurements.

(If an AC adapter is used)

**Duration of recording** NL-52/42

1000 h (approx. one month)

Previous model =


= 200 h (approx. one week)

Example of detailed recording

If the  $L_p$  is measured at 100 ms intervals and the  $L_{eq}$  is simultaneously measured at 10 min intervals over a 24 h period, the total size of accumulated data is approximately 74 MB (reference value)

## Functionality can be extended by a range of options


Additional functions can be added, such as simultaneous logging of raw data (100 ms  $L_p$ ) and processed data(Leq and other indices), frequency analysis reverberation time measurement and long-term data recording.



1/3 octave band analysis screen



FFT analysis screen (x40)

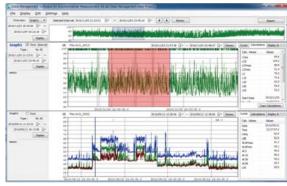

Data management screen of AS-60 software


## **Optional program function list**

When the optional programs are installed, the following functions are added:



The NX-42EX is supplied on the 512 MB SD card. The 512 MB SD card can be used as a memory card after installing the program.

# NX-42EX Auto store function (instantaneous value, processed value) Comparator function Continuous data output function

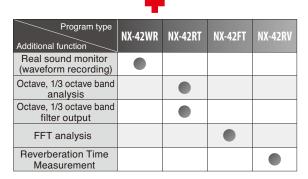

<sup>\*</sup> The NX-42EX program cannot be uninstalled.

#### Auto store function


This function enables continuous measurement in  $L_P$  mode (instantaneous SPL) and  $L_{\text{eq}}$  mode (equivalent continuous SPL) to be conducted simultaneously.

Total measuring time of Auto store function

Up to 1000 h


Equipped with a timer function

Lp mode (instantaneous SPL) and Leq mode (equivalent continuous SPL) concept

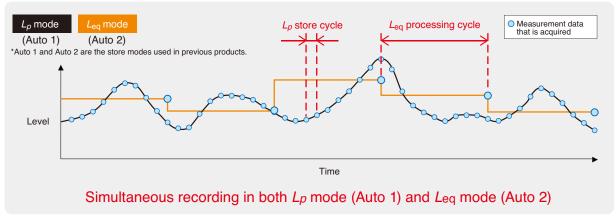

#### Comparator function

This function turns on when the open collector output exceeds the set value (max. applied voltage 24 V, max. current 60 mA, allowable dissipation 300 mW).

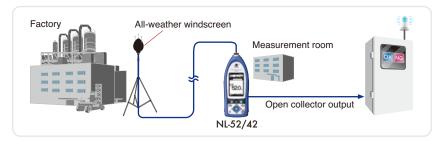

#### Continuous data output function

This function enables the continuous acquisition of instantaneous values and processed values during both USB and RS-232C communication.

This is a convenient function for users who can design their own control programs, where data has to be transferred continuously from the sound level meter to the computer.

#### **Waveform recording** program NX-42WR

This function enables users to record sounds and to process sound levels simultaneously. Recorded data can be played on computer and used for frequency analysis.

(Uncompressed waveform WAVE file)

Sampling at 48 kHz, 24 kHz, 12 kHz, Selection of 24 bit or 16 bit


Maximum recording time (16 bit)

Memory card Sampling frequency	512 MB	2 GB	32 GB
48 kHz	1 h	4 h	79 h
24 kHz	2 h	9 h	158 h
12 kHz	4 h	18 h	315 h

The NX-42WR is supplied on the 2 GB SD card. The 2 GB SD card can be used as a memory card after installing the program.


#### Octave, 1/3 octave real-time analysis program NX-42RT









By adding the NX-42RT program to the NL-52/NL-42, octave band and 1/3 octave band analysis can be performed. Saved analysis results can be loaded and shown in an overlay graph display together with current analysis data. NC curve graph display and NC value calculation/display are also possible. Using the AS-60RT software, data can be utilized and managed on a computer.



1/3 octave band analysis screen



Overlay analysis screen



NC curve screen



Partial over all screen




Measurement screen (Level-Time graph)


#### **Reverberation Time** Measurement **Program** NX-42RV




The NX-42RV is supplied on the 512 MB SD card. The 512 MB SD card can be used as a memory card after installing the program. By adding the NX-42RV program to the NL-52/42, reverberation time measurements can be performed. The measurement method is the interrupted noise method. This program allows storage of reverberation time decay curves, T20/T30 calculation, Txx calculation (reverberation time calculation based on a user-defined interval) and averaged reverberation time results displayed on the SLM screen.



Measuring screen (graph)



Measuring screen (numeric)



Reverberation time decay curve screen



Result screen (T20/T30/Txx)


#### **FFT** analysis program NX-42FT





The NX-42FT is supplied on the 512 MB SD card. The 512 MB SD card can be used as a memory card after installing the program.




By adding the NX-42FT program to the NL-52/NL-42, FFT analysis can be performed. The analysis frequency range is 20 kHz, with 8 000 spectrum lines (200 displayed). Saved analysis results can be loaded and shown in an overlay graph display together with current analysis data. Maximum zoom ratio is x40, and the top list screen can show up to 20 lines.









96.9<sub>d</sub>



Analysis screen (x1)


Analysis screen (x40)

Overlay analysis

Linear average

Top list screen

#### **System construction**

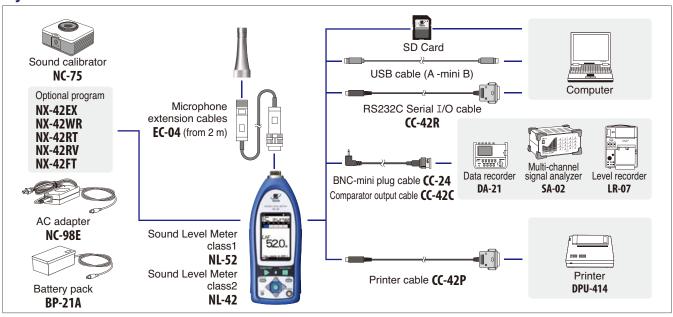

#### Peripheral devices

## All-weather windscreen WS-15



This windscreen is designed for outdoor installations. It helps to reduce wind noise and is equipped with rainproof features that satisfy the IPX3 water-resistant specifications. It is used with a microphone extension cable.

(Mounting adapter WS15006 required separately)

(For All-weather windscreen WS-15, use of ST-81 is recommended.)

## Rain-protection windscreen **WS-16**



This screen protects the microphone against rain for a short period of time.
The rainproof performance of this windscreen is designed to satisfy the IPX3 water-resistant specifications.

## Sound calibrator NC-75



This Sound calibrator conforms to IEC 60942 (JIS C 1515), class 1, providing a level of performance sufficient for calibrating the precision sound level meter.

Specifications	
Nominal acoustic pressure level	94 dB
Nominal frequency	1 kHz

## PISTONPHONE NC-72A



Compliant with JIS C 1515: 2004 (IEC 60942: 2017) class LS/C, class 1/C Allows calibration with accuracy

of ± 0.10 dB.

Specifications

Nominal acoustic

pressure level

Nominal frequency

114 dB

250 Hz

## Tripod ST-80




This stand can be used for general acoustic measurements. The sound level meter and microphone can be mounted on the stand.

## Waveform analysis software AS-70

This software allows you to load stored WAVE files from a RION sound level meter, vibration meter or data recorder. Octave, 1/3 octave, and FFT analyses can then be performed. Playback of the real sound files is also possible.

#### Specifications

Waveform analysis	Calculations	Maximum value, Minimum value, Average value, RMS, Variance,
		Differential and integral calculus, HPF, LPF
Frequency weighting	ng	Z, A, C, G, C to A, L <sub>v</sub> (vertical) (JIS C 1510), L <sub>v</sub> (horizontal) (JIS C 1510)
FFT analysis	Analysis points	32 to 65 536 points
	Display data	Power spectrum, Power spectral density, Spectrogram
Time weighting		10 ms, F, 630 ms, S, 10 s
Octave band	Applicable standards	IEC 61260 Class 1 (JIS C 1514 Class 1)
analysis	Analysis frequency	Octave band 0.5 Hz to 16 kHz (16 bands)
	range	1/3 octave band 0.4 Hz to 20 kHz (48 bands)

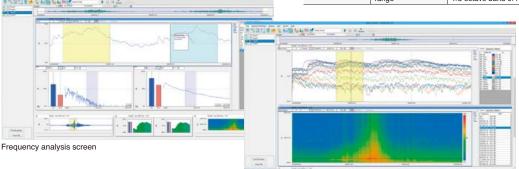

Frequency analysis screen

Recomm	ended computer specifications
CPU	Intel Core™2 Duo 2 GHz or

higher

RAM 2 GB or more
(4 GB recommended)

HDD 20 GB free or more
(100 GB or more recommended)

DISPLAY XGA (1 022 × 768) or more

OS Microsoft Windows
7 Professional 32 bit /
64 bit, 8.1 Pro 64 bit,
10 Pro 64 bit

## Complete software for environmental measurements


#### Data management software for environmental measurement AS-60

Data management software for environmental measurement AS-60 enables the graph display of measurement data, arithmetic processing, excluded sound processing, preparation of reports, output of files, and playback of real sound files.


- Reports easy to prepare
- data items (up to 8 data items)
- Simultaneous display of multiple Data stored in a data recorder can Data combination be loaded (CSV file for DA-40 Viewer)

trial version now available on

our website

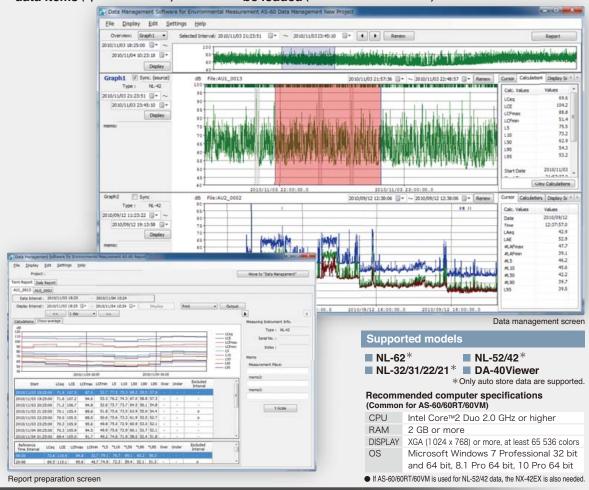


#### Data management software for environmental measurement AS-60RT (Includes the octave and 1/3 octave data management software)

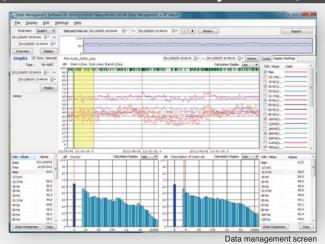

#### Adds support for handling octave band analysis data to AS-60

AS-60RT is for managing NX-62RT/42RT or NA-28 data on a computer.



Data management software for environmental measurement AS-60VM (Includes the vibration level data management software)

Adds support for handling data measured with VM-55EX/53A to AS-60

Supported models ■ VM-55EX\* ■ VM-53A\* \*Only auto store data are supported.

		Δ	A		
Sno	ocifications				
She	ecifications	520.	420.		
		NL-52	NL-42		
Applic	able standards	IEC 61672-1: 2013/2002 class 1	IEC 61672-1: 2013/2002 class 2		
		ANSI/ASA S1.4-2014/Part1 class 1	ANSI/ASA S1.4-2014/Part2 class 2		
		JIS C 1509-1: 2017 class 1	JIS C 1509-1: 2017 class 2		
		CE marking	nort model for Chine only)		
Measi	urement functions	WEEE Directives, Chinese RoHS (exp Simultaneous measurement of the fol			
IVICUS		weighting and frequency weighting	lowing items, with selected time		
Pro	cessing (main ch)	Instantaneous sound pressure level: L			
	,	Equivalent continuous sound pressure level: Leq			
		Sound exposure level: LE	·		
		Maximum sound pressure level: Lmax			
		Minimum sound pressure level: L <sub>min</sub>			
		· · · · · · · · · · · · · · · · · · ·	%, 0.1-increment steps, max. 5 values)		
_	cessing (sub ch)	Instantaneous sound pressure level: I			
Add	ditional processing	In addition to main processing items,	one of the following can be selected		
		for simultaneous processing:	and level: / c		
		C-weighted equivalent continuous sou C-weighted peak sound level: L <sub>Cpeak</sub>	and level. LCeq		
		Z-weighted peak sound level: Lzpeak			
		I-time-weighted equivalent continuous so	ound level: LAIeg*2		
		Maximum I-time-weighted equivalent cor	· ·		
		The power average of the maximum leve			
		The frequency weighting for the additional proce	essing synchronizes with the frequency weighting		
		of the sub-channel, so when the sub-channel ha	s A-weighting, L <sub>Atm5</sub> can be selected.		
		When C-weighting (Z-weighting ) is selected,	the additional processing $L_{Ceq}$ and $L_{Cpeak}$		
		(Lzpeak) are selectable.			
Microph	none Type	UC-59	UC-52		
	Sensitivity leve		-33 dB		
Meas	urement range	A-weighting: 25 dB to 138 dB			
		C-weighting: 33 dB to 138 dB			
		Z-weighting: 38 dB to 138 dB	to 141 dB		
		C-weighting peak sound level: 55 dB Z-weighting peak sound level: 60 dB t			
Inhere	ent A-weighting	17 dB or less	19 dB or less		
noise	C-weighting	25 dB or less	27 dB or less		
	Z-weighting	30 dB or less	32 dB or less		
Frequ	ency range	10 Hz to 20 kHz	20 Hz to 8 kHz		
Frequ	ency weighting	A, C, and Z			
Time	weighting	F (Fast) and S (Slow)			
Level	range	Single range (Linearity range: 113 dB)	)		
_	graph display range ma				
	tching of bar graph display		rements.		
	detection circuit	Digital processing method			
Samp	ling cycle	20.8 µs (Lp, Leq, LE, Lmax, Lmin, Lpeak	: sampling frequency: 48 kHz)		
Calibr	ation	100 ms ( <i>L<sub>N</sub></i> )  Electrical calibration performed accord	ding to IEC and IIS standards using		
Calibi	ation	internally generated signals: acoustic			
Corre	ction functions	Windscreen correction:	calibration performed with the 140 75.		
000			1 standards when the windscreen is installed.		
		Diffuse sound field correction:			
		Correction of frequency characteristic	s in order to comply with standards		
		(ANSI S1.4) in diffuse sound field.			
Delay	time	The meter can be set to start measuring	g a specified time (OFF, 1, 3, 5 or 10 s)		
		after the start button has been pressed	or when a user-set trigger is exceeded.		
Back	erase function	When the PAUSE key is pressed to pa	ause measurement, the preceding		
		(user selectable) 0, 1, 3 or 5 s data ar			
Displa	ıy	Backlit semitransparent color TFT LC			
_		*LCD with touch panel (Capacitive Touch Panel)			
04-	Manus	Numerical display update frequency: 1 s	0 1 1 1 7		
Store	Manual Number of data	Data for measurement results are stored Internal memory: max. 1 000 sets	a manually in single address increments.		
	inumber of data	SD Card: depends on the capacity of	the SD Card*1		
	Auto*2	Instantaneous values ( $L_P$ mode) and			
	7.310	stored continuously and automatically	· ·		
	L <sub>P</sub> sampling cycle				
	Leq sampling cycle		and user selected time (up to 24 hours)		
	Measurement Time				
		storage mode(depends on the capacit	ty of the SD card)*1		

Setup	mem	norv	Up to five setup configurations can be saved in internal memory, for later recall	
o			Start up via file settings previously stored on SD card possible	
Wavefo	orm re	cording*3		
File format			Uncompressed waveform WAVE file	
Sar	nnlina	frequency	Select 48 kHz, 24 kHz or 12 kHz	
_	ta len		Select 24 bit or 16 bit	
_		output	Output DC signals using a frequency weighting characteristic selected by processing	
Outputo	_	output voltage	2.5 V, 25 mV / dB at bar graph display full scale	
	$\vdash$	output	Output AC signals using a frequency weighting characteristic selected by	
	710	output	processing or by A, C, Z-weighting.	
		Output voltage	1 V (rms values) at bar graph display full scale	
	-	nparator	Turns on when the open-collector output exceeds the set value	
		out*2	(max. applied voltage 24 V, max. current 60 mA, allowable dissipation 300 mW).	
USB	out	, , ,	Allows USB to be connected to a computer and recognized as a removable dis	
005			Allows USB to be controlled via communication commands	
RS-23	32C c	ommunication	Allows for RS-232C communication via use of a dedicated cable	
		uous output*2	There is the Edge communication has doe of a decidated capit	
Type of Instantaneous value		· · · · · · · · · · · · · · · · · · ·	Lo	
		Processed value	Leg, Lmax, Lmin, Lpeak	
Output interval			100 ms	
Print o			Printing of measurement results on dedicated printer DPU-414	
		irements	Four IEC R6 (size AA) batteries (alkaline or rechargeable batteries) or external power supply	
		ife (23 °C)	Alkaline battery LR6 (AA): 26 h Ni-MH secondary battery: 25 h	
		(,	At the maximum *Depends on the setting	
AC	adar	oter	NC-98E	
		power voltage	5 to 7 V (rated voltage: 6 V)	
Current consumption			Approximately 90 mA (normal operation, rated voltage)	
Ambie	_	Temperature	-10 to +50 °C	
1000		Humidity	10 to 90 % RH (non-condensing)	
Dustproof / water-resistant			IP code: IP54 (except for microphone)	
performance*4			See precautions regarding waterproofing	
		s, weight	Approx. 250 (H) x 76 (W) x 33 mm(D), approx. 400 g (with batteries)	
		cessories	Storage case x 1, Windscreen WS-10 x 1, Windscreen fall prevention rubber x 1,	
Supplied decessions			Hand strap x 1, LR6 (AA) alkaline batteries x 4, SD card 512 MBx1 (NX-42EX	
			preinstalled model only)	

#### Options

Product name	Product number
Extended function program (Inst.on 512 MB SD card)	NX-42EX
Waveform recording program*2 (Inst.on 2 GB SD card)	NX-42WR
Octave, 1/3 octave real-time analysis program*2 (Inst.on 512 MB SD card)	NX-42RT
Reverberation time measurement program*2 (Inst.on 512 MB SD card)	NX-42RV
FFT analysis program*2 (Inst.on 512 MB SD card)	NX-42FT
Data management software for environmental measurement	AS-60
Data management software for environmental measurement (Includes the octave and 1/3 octave data management software)	AS-60RT
Data management software for environmental measurement (Includes the vibration level data management software)	AS-60VM
Waveform analysis software	AS-70
SD Card 512 MB	MC-51SD1
SD Card 2 GB	MC-20SD2
SD Card 32 GB	MC-32SP3
AC adapter (100 V to 240 V)	NC-98E
Battery pack	BP-21A
Microphone extension cables	EC-04 (from 2 m)
BNC-Pin output code	CC-24
Comparator output cable	CC-42C
Printer	DPU-414
Printer cable	CC-42P
RS 232C serial I/O cable	CC-42R
USB cable	Generic USB cable can be used
Sound calibrator	NC-75
All-weather windscreen	WS-15
Windscreen mounting adapter	WS-15006
Rain-protection windscreen	WS-16
Sound level meter tripod	ST-80
All-weather windscreen tripod	ST-81

\*4 Protection against harmful dust and water splashing from any direction.

Before use, verify that the rubber bottom cover and the battery compartment lid are firmly closed.

To maintain the water and dust proof rating, internal packing replacement is required every two years (at cost).



RION Co., Ltd. is recognized by the JCSS which uses ISO/IEC 17025 (JIS Q 17025) as an accreditation standard and bases its accreditation scheme on ISO/IEC 17011. JCSS is operated by the accreditation body (IA Japan) which is a signatory to the Asia Pacific Laboratory Accreditation Cooperation (APLAC) as well as the International Laboratory Accreditation Cooperation (ILAC). The Quality Assurance Section of RION Co., Ltd. is an international MRA compliant JCSS operator with the accreditation number JCSS 0197.

ISO 14001 RION CO., LTD. ISO 9 0 0 1 RION CO., LTD.



\* Windows is a trademark of Microsoft Corporation. \* Specifications subject to change without notice

storage mode(depends on the capacity of the SD card)  $\fint 1$ 

Allows viewing of stored data

Distributed by:

Data recall



3-20-41, Higashimotomachi, Kokubunji, Tokyo 185-8533, Japan Tel: +81-42-359-7888 Fax: +81-42-359-7442



This product is environment-friendly. It does not include toxic chemicals on our policy.

This product is certified to an International Protection rating of IP54 (dust protected and resistant to splashing water).

This leaflet is printed with environmentally friendly UV ink.